


軸直角変位量早見表

フランジ接続ホースの長さの設定の際には、ホースの伸縮を考慮してゆりみを持たせる必要がありますが、レイアウト上不可能な場合でも、ホース性能の範囲内で接続部の軸直角方向変位量を吸収することができます。下記の許容早見表をホース設置検討のご参考にしてください。

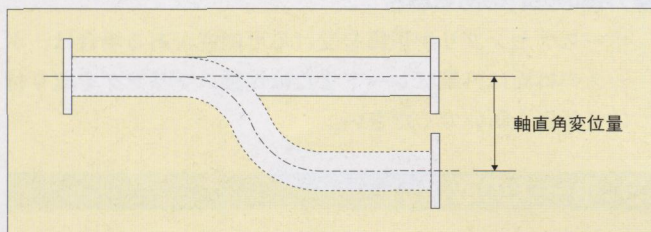

●TOMBO No.9067-A-F

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
10	3/8	12	26	40	54	68	83	97	111	125
15	1/2	12	26	40	54	68	83	97	111	125
20	3/4	10	24	38	52	66	80	94	108	122
25	1	6	21	35	49	63	77	91	105	119
32	1 1/4	4	18	32	46	60	75	89	103	117
40	1 1/2	2	16	30	44	58	72	86	100	114
50	2	-	10	24	38	52	66	80	94	108
65	2 1/2	-	2	16	30	44	58	72	86	101
80	3	-	-	11	25	39	53	68	82	96
100	4	-	-	4	18	32	46	60	74	88

●TOMBO No.9067-A-FB

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
10	3/8	12	26	40	54	68	82	96	110	124
15	1/2	12	26	40	54	68	82	96	110	124
20	3/4	9	23	37	51	65	79	93	107	121
25	1	6	20	34	48	62	76	90	104	118
32	1 1/4	4	18	32	46	60	74	88	102	116
40	1 1/2	1	15	29	43	57	71	85	99	113
50	2	-	9	23	37	51	65	79	93	107
65	2 1/2	-	1	15	30	44	58	72	86	100
80	3	-	-	11	25	39	53	67	81	95
100	4	-	-	4	18	32	46	60	74	88

●TOMBO No.9068-F

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
15	1/2	13	27	41	55	69	83	97	111	125
20	3/4	10	24	38	52	66	80	94	108	122
25	1	7	21	35	49	63	77	91	105	119
32	1 1/4	4	18	32	46	60	74	88	102	116
40	1 1/2	-	15	29	43	57	71	85	99	113
50	2	-	11	25	39	53	67	81	95	109
65	2 1/2	-	4	18	32	46	60	74	88	102
80	3	-	-	13	27	41	55	69	83	97

- 表の数値は直線状にセットした場合の計算値です。
- 金属接続のホースの軸直角変位量は、曲がらない部分(金具長さ)を除いた製品長さとなります。

●TOMBO No.9065-F

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
15	1/2	7	21	35	49	63	77	91	105	119
20	3/4	7	21	35	49	63	77	91	105	119
25	1	4	18	32	46	60	74	88	102	116
32	1 1/4	-	8	22	36	50	64	78	92	106
40	1 1/2	-	8	22	36	50	64	78	92	106
50	2	-	-	14	28	42	56	70	84	98
65	2 1/2	-	-	9	23	37	51	65	79	93
80	3	-	-	15	29	43	57	71	85	99
100	4	-	-	3	17	31	45	59	73	87

●TOMBO No.9067-A-HW-F

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
10	3/8	14	28	42	56	70	84	98	112	126
15	1/2	14	28	42	56	70	84	98	112	126
20	3/4	11	25	40	54	68	82	96	110	124
25	1	9	23	37	51	65	79	93	107	121
32	1 1/4	7	21	35	49	63	77	91	105	119
40	1 1/2	5	19	33	47	61	75	89	103	117
50	2	-	13	27	41	55	69	83	97	111
65	2 1/2	-	7	21	35	49	63	77	91	105
80	3	-	2	16	30	44	58	72	86	100
100	4	-	-	9	23	37	51	65	79	93

●TOMBO No.9067-A-HW-FB

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
10	3/8	12	26	40	54	68	82	96	110	124
15	1/2	11	25	39	53	67	81	95	109	123
20	3/4	9	23	37	51	65	79	93	107	121
25	1	5	19	33	47	61	75	89	103	117
32	1 1/4	3	17	31	45	59	73	87	101	115
40	1 1/2	1	15	29	43	57	71	85	99	113
50	2	-	9	23	37	51	65	79	93	107
65	2 1/2	-	2	16	30	44	58	72	86	100
80	3	-	-	10	24	38	52	66	80	94
100	4	-	-	3	17	31	45	59	73	87

●TOMBO No.9068-B

呼称寸法	製品長さ (mm)									
	200	300	400	500	600	700	800	900	1000	
	許容軸直角変位量 (mm)									
15	1/2	10	24	38	52	66	80	94	108	122
20	3/4	8	22	36	50	64	78	92	106	120
25	1	5	19	33	47	61	75	89	103	117
32	1 1/4	-	13	27	41	55	69	83	97	111
40	1 1/2	-	11	25	39	53	67	81	95	109
50	2	-	4	18	32	46	60	74	88	102
65	2 1/2	-	-	13	27	41	55	69	83	97
80	3	-	-	8	22	36	50	64	78	92